

HCSP-3BS

Three-phase Open Loop Current Sensor - Busbar Mounting



KEY FEATURES

- ▶ Open loop current transducer based on Hall effect
- ▶ Measured current values up to ±1.200 A
- ▶3-phase busbar mounting
- ▶ 3 simple analog ratiometric outputs
- ► Non-intrusive technology
- ▶ Galvanic separation between power and control
- ► Full compatibility with Infineon HybridPack
- ▶ Press fit contacts to eliminate soldering
- ▶ Operating temperature from -40°C to +125°C

DESCRIPTION

Piher Sensing Systems' HCSP3BS is a three-phase open loop current sensor that generates a ratiometric analog output voltage signal proportional to the current flowing through the conductor. Based on Hall effect technology the sensor has been designed for accurate measurement of AC and DC currents in automotive battery management and motor control applications.

APPLICATIONS

- ► Motor control
- ► EV motor inverters
- ▶ DC/DC converters


SPECIFICATIONS							
Parameter	Unit	Min.	Тур.	Max.			
Supply voltage	V	4,5	5	5,5			
Supply current	mA	33	42	48			
Output voltage	V	0,5		4,5			
Offset voltage	V		2,5				
Frequency bandwidth	kHz	70		250			
Operating temperature	°C	-40		+125			
Typical error (at 25°C; V _{cc} = 5V)	%	0,65		2,5			
Max. error (at -40°C to +125°C; V _{cc} = 5V)	%	1		3,5			


Other specification on request


HCSP-3BS


Three-phase Open Loop Current Sensor - Busbar Mounting


DIMENSIONS (IN MM)

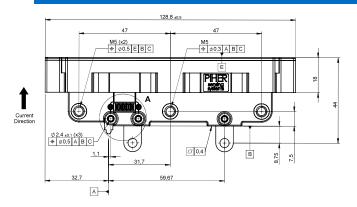

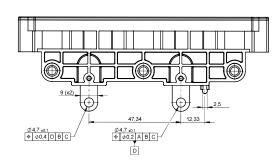

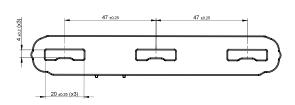





ORDER CODE							
HCSP-3BS	0800	0900	1000	1100	1200		
Current measuring range	±800 A	±900 A	±1000 A	±1100 A	±1200 A		
Sensitivity*	2,5 mV/A	2,22 mV/A	2 mV/A	1,81 mV/A	1,67 mV/A		
Sensitivity error*	± 0,6 %						
Electrical offset voltage*	± 3 mV						

^{*}at 25°C / Vcc = 5V; Other specification on request









Please always use the latest updated datasheets published on our website.

Disclaimer:

The product information in this catalog is for reference purposes. Please consult for the most up to date and accurate design information.

Piher Sensors & Controls S.A., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Piher"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product described herein.

Piher disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Piher's terms and conditions of sale, including but not limited to the warranty expressed therein, which apply to these products.

No license express or implied by estopped or otherwise to any intellectual property rights is created by this focus ment or by any conduct of Piher.

apply to these products.

No license, express or implied, by estopped or otherwise, to any intellectual property rights is granted by this document or by any conduct of Piher.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Piher products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Piher for any damages arising or resulting from such use or sale. Please contact authorized Piher personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners. Information contained in and/or attached to this catalogue may be subject to export control regulations of the European Community, USA, or other countries. Each recipient of this document is prossible to ensure that usage and/or transfer of any information contained in this document complies with all relevant export control regulations. If you are in any doubt about the export control restrictions that apply to this information please contact the sender immediately. For any Piher Exports, Note: All products, I technologies are EAR99 Classified commodities. Exports from the United States are in accordance with the Export Administration Regulations. Diversion contrary to US law is prohibited.

CONTACT

Piher Sensing Systems

Polígono Industrial Municipal Vial T2, N°22 31500 Tudela Spain

sales@piher.net

+34 948 820 450 Americas: +1 636 251 0855 Asia Pacific: +65 9641 8886